


Technical Monitor	Title		
T. Farrell/EA4/281-483-8123	International Space Station Program Configuration 132 – Step 058 Stage 13A.1 ISS – After Separation		
Approved By			
M. Falou/LM/281-333-6326			
Produced By	Contract	Item Number	
Brad Henry	NAS9-19100 Science Engineering Analysis & Test	02-DR0061	
	NASA Center/Division	Revision	Date
	JSC/Systems Engineering Office	Original	5/1/02

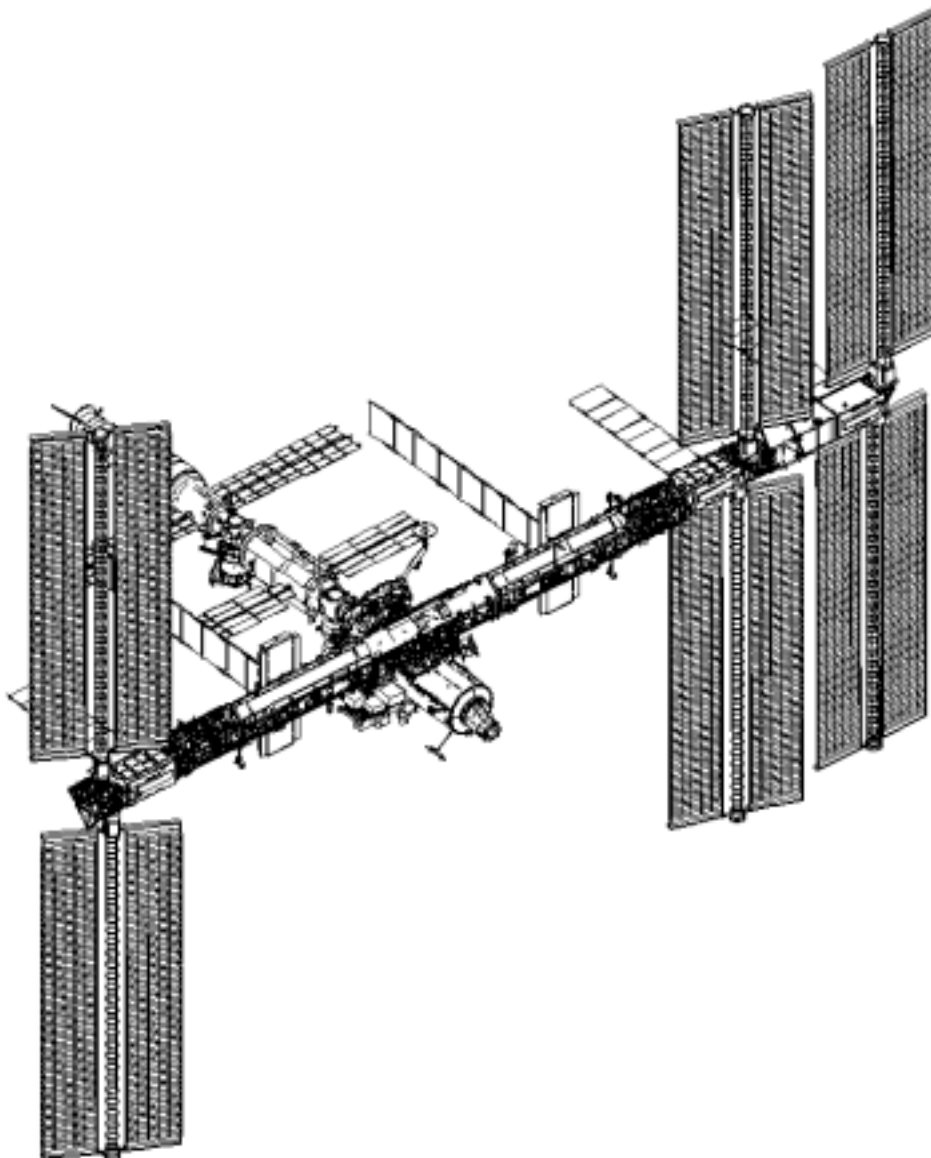

Technical Monitor	Title		
T. Farrell/EA4/281-483-8123	International Space Station Program Configuration 132 – Step 058 Stage 13A.1 ISS – After Separation		
Approved By			
M. Falou/LM/281-333-6326			
Produced By	Contract	Item Number	
Dean Coleman	NAS9-19100 Science Engineering Analysis & Test		02-MP0121
	NASA Center/Division	Revision	Date
	JSC/Systems Engineering Office	Original	5/1/02

Total mass:

467752. lb
212169. kg

Center of mass:

X	Y	Z
-24.79	-9.51	8.73 ft
-7.56	-2.90	2.66 m

Inertia tensor*:

	slug*ft**2		
51343920.	3456231.	2153119.	
3456231.	25921908.	-1823896.	
2153119.	-1823896.	71229792.	
	kg*m**2		
69612976.	4686018.	2919236.	
4686018.	35145372.	-2472870.	
2919236.	-2472870.	96574584.	

Principal moments of inertia (IXX, IYY, IZZ):

51622651.	25363831.	71504547.	slug*ft**2
69993056.	34389788.	96950112.	kg*m**2

Principal to body roll, pitch, yaw in a 1 2 3 sequence:

-2.63	-5.47	-8.04 degrees
-------	-------	---------------

Center of pressure:
(WRT CM)

	X ft	Y ft	Z ft
CPx	.00E+00	-3.90E+01	-8.11E+00
CPy	3.85E+00	.00E+00	-3.69E+00
CPz	-1.00E+01	-7.24E+00	.00E+00
	X m	Y m	Z m
CPx	.00E+00	-1.19E+01	-2.47E+00
CPy	1.17E+00	.00E+00	-1.12E+00
CPz	-3.05E+00	-2.21E+00	.00E+00

Projected areas:

	X	Y	Z
	23075.73	7598.24	7959.63 ft**2
	2143.81	705.90	739.47 m**2

*Off-diagonal elements are negative integrals